

# Coin and Token Shower Timers for One to Three Showers SLZA 01LM, SLZA 01LMZ



SLZA 01LM




SLZA 01LMZ

## Characteristics




- **hygienic flush**
- **vandal-proof**
- **choice of shower by the user**
  - before inserting a coin or token the user chooses the requested shower by the push button, the number of shower is shown on the display
- **direct control**
  - after inserting a coin or a token the device starts water flow on several seconds to indicate the chosen shower
  - after set delay the device starts water flow for paid time
- 30 s before the end of water supply the user is warned by interrupting of water flow
- the device adds up the coins but does not return
- index Z - recessed
- parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time delay of switch on, current euro exchange, token value, display contrast, possibility switch off some from showers)
- marking of the buttons by symbols could be made to order
- the possibility of obtaining the statistical information, device diagnostics
- lockable
- for indoor use, temperature range +5 to +40 °C
- material stainless steel AISI 304 (1.4301)
- brushed finish


## Installation Drawing

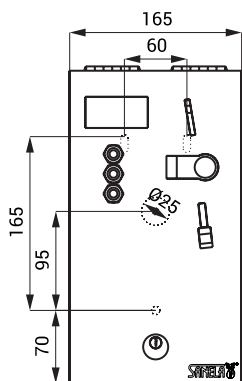

SLZA 01LM

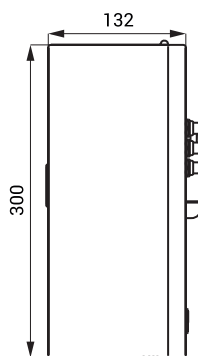

SLZA 01LMZ

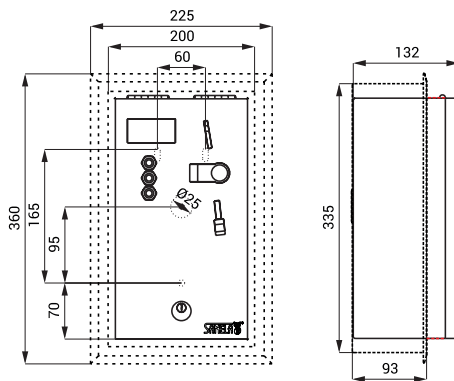

SLZA 01LMZ

## Technical Specification

<b>Niche dimensions (index Z)</b>	335 x 200 x 125 mm
<b>Dimensions</b>	
▪ SLZA 01LM	300 x 165 x 132 mm
▪ SLZA 01LMZ	360 x 225 x 132 mm
<b>Weight</b>	
▪ SLZA 01LM	4,5 kg
▪ SLZA 01LMZ	6,2 kg
<b>Thickness of material</b>	1,5 mm
<b>Operating voltage</b>	24 V DC
<b>Power input</b>	26 W (depends on the accessories and the number of showers)
<b>Accepted coins</b>	1 and 2 €, token (other currencies on request)
<b>Switch on delay</b>	0 - 255 sec., standard 30 sec.
<b>Showering time</b>	5 - 1200 sec.

## Supply Specification

- SLZA 01LM** - Supply No. 88015 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.)
- SLZA 01LMZ** - Supply No. 88016 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.), mounting frame

## Required Accessories



<b>SLZA 20</b>	<b>88200</b>	Shower control without piezo button - premixed water
----------------	--------------	---



<b>SLZA 20H</b>	<b>88205</b>	Shower control without piezo button - for cold and hot water, temperature regulated by mixer
-----------------	--------------	---



<b>SLZA 20T</b>	<b>88206</b>	Shower control without piezo button - for cold and hot water, temperature regulated by thermostatic mixer <i>- thermostatic valve nut spanner SLA 64</i>
-----------------	--------------	--



<b>SLZA 21</b>	<b>88210</b>	Stainless steel shower panel without piezo button - premixed water
----------------	--------------	--



<b>SLZA 21H</b>	<b>88215</b>	Stainless steel shower panel without piezo button - for cold and hot water, temperature regulated by mixer
-----------------	--------------	--



<b>SLZA 21T</b>	<b>88216</b>	Stainless steel shower panel without piezo button - for cold and hot water, temperature regulated by thermostatic mixer
-----------------	--------------	---

## Recommended Accessories

SLZ 01Y	-	Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of showers
SLZ 01Z	-	Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of showers
SLZ 04Y	-	Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
SLZ 04Z	-	Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
SLZ 04X	-	Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
SLD 05	-	Supply No. 07050	remote control for an adjustment of parameters
SLA 03	-	Supply No. 06030	vandal-proof shower head
SLA 39	-	Supply No. 06390	vandal-proof shower head
SLA 40	-	Supply No. 06400	vandal-proof shower head with possibility to set an angle of water flow
SLA 64	-	Supply No. 06640	thermostatic valve nut spanner (SLZA 20T)
SLZA 50	-	Supply No. 88500	set of 50 pcs. of tokens for coin device