

Automatic Shower Controls with Piezo Button

SLS 02P, SLS 02PT



SLS 02P



SLS 02PT

Characteristics:




- **vandal-proof**
- water flows after soft push of the piezo button
- adjustable flowing time from 10 s to 5 min, standardly adjusted to 30 s
- water could be stopped by follow-up soft push of piezo button
- parameters adjustment by SLD 04 remote control
- function switch ON/OFF

Technical Specification:

Dimension of stainless steel cover	170 x 170 x 10 mm
Dimension of mounting box	150 x 160 x 65 mm
Operating voltage:	
- SLS 02P/PT	24V DC
- SLS 02PB, SLS 02PTB	battery 9V
Power input	
- operating by 24V DC	5 W
- operating by 9V	1,4 W
Active range	0,3 - 0,7 m
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	12 l/min. (inf. data)
Water inlet	male thread G 3/4"
Water outlet	male thread G 3/4"

Installation Drawing:

- 1 - water supply
- 2 - stainless steel cover with electronics
- 3 - stainless steel box with the electromagnetic valve
- 4 - piezo button
- 5 - mixer (SLS 02P) thermostatic mixer (SLS 02PT)
- 6 - outlet pipeline
- 7 - cable from the power supply
- 8 - shower head (isn't a part of delivery)

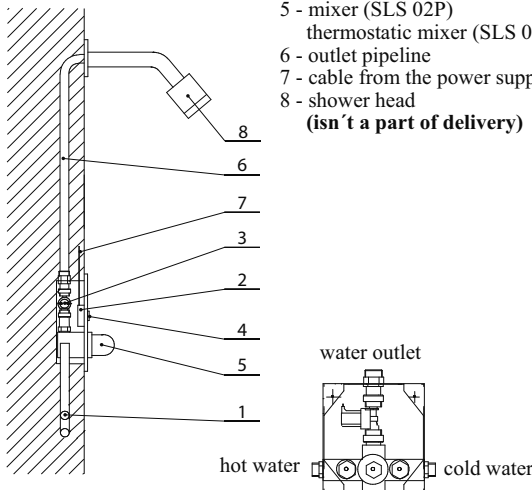

Supply Specification:

SLS 02P – **supply No. 12022** stainless steel cover
SLS 02PB – **supply No. 12023** with an intergrated electronics; stainless
SLS 02PT – **supply No. 12024** steel mounting box
SLS 02PTB – **supply No. 12025** with a brass screw coupling, electromagnetic valve (1 pc.), built-in mixer, thermostatic mixer (only for models with „T“ index); lithium battery SLA 09 (only for models with „B“ index)

Recommended Accessories:

- SLZ 01Y** – **supply No. 05012** external power supply 230/24V DC for operating of max. 2 pcs. of shower controls (page 118)
SLZ 01Z – **supply No. 05011** external power supply 230/24V DC for operating of max. 4 pcs. of shower controls (page 118)
SLZ 03 – **supply No. 05030** switched external power supply 230/24V DC for operating of max. 9 pcs. of shower controls (see page 118)
SLD 04 – **supply No. 07040** remote control for an adjustment of parameters of radar flushing unit and piezo electronics (see page 115)
SLA 09 – **supply No. 06090** lithium battery 9V/1200 mAh, type U9VL, battery life app. 2 years at 100 uses per a day (only for models with „B“ index) (see page 115)
SLA 17 – **supply No. 06170** stainless steel vandal-proof shower rosette (see page 115)
SLA 28 – **supply No. 06280** shower rosette (see page 115)